


TECHNICAL DATA
LHIP-0501-115/339
CYLINDRICAL HELIUM-NEON LASER HEAD

Wavelength	1.15 μm/3.39 μm
Minimum Output Power	2.0 mW/3.0 mW
Power 3 Seconds After Turn-On	> 75%
Polarization	Linear > 500:1
Mode Structure	TEM ₀₀ > 99%
Beam Diameter	0.90mm (1.15 μm)
Beam Divergence	1.62mrad (1.15 μm)
Beam Diameter	1.55mm (3.39 μm)
Beam Divergence	2.78mrad (3.39 μm)
Longitudinal Mode Spacing	316 MHz
Beam Drift After 20 Minute Warm-Up	< 0.2 mrad
Long Term Beam Drift	< 0.05 mrad
Noise (30 Hz - 10 MHz)	< 20% rms
Starting Voltage	< 10 kVDC
Operating Voltage	2800 VDC
Series Resistors in Housing	94 KΩ
Operating Current	6.50 mA
Shock	15 g for 11 msec
Weight	750 grams
Dimensions	
Length	533.4±1.0 mm (21.00±0.04")
Diameter	44.5±0.5 mm (1.75±0.02")
Maximum Output Power (1.15 μm)	5.0 mW
Maximum Output Power (3.39 μm)	5.0 mW
CDRH Classification	IIIb
Recommended Power Supply	LPS-H1 or CPS-H1

ENVIRONMENTAL SPECIFICATIONS

Temperature	<u>Operating</u> -20 - +70° C	<u>Non-Operating</u> -40 - +80° C
Humidity	≤ 80%	≤ 95%
Altitude	0-3,000 meters	0-6,000 meters

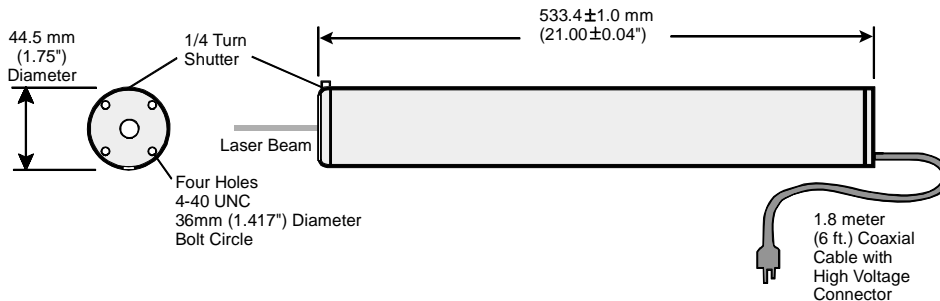

Research Electro-Optics, Inc.
 1855 South 57th Court, Boulder, Colorado 80301 (303) 938-1960 FAX (303) 447-3279